

Flow Hopper


Innovative Through-Hole Hopper



The innovative electronics and high-resistance plastic materials ensure durability over time. Available in two interfaces – standard parallel and ccTalk serial. Supplied with quick-release plate.

Features

- ✓ Integrated fall tube for simple dual-hopper cabinet construction
- ✓ Clean design – no external wires run for level sensors
- ✓ ccTalk version is available in encrypted and non-encrypted modes
- ✓ Reliable through-hole coin disk design
- ✓ Low level sensor and anti-jam feature






Reject Exit



Security clip


Technical Schematics

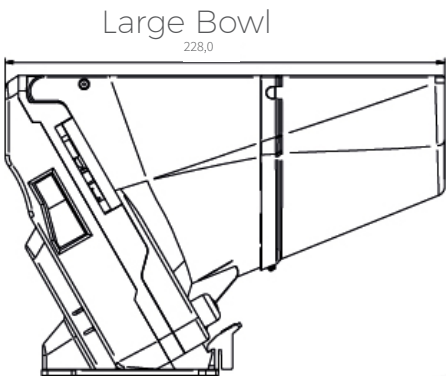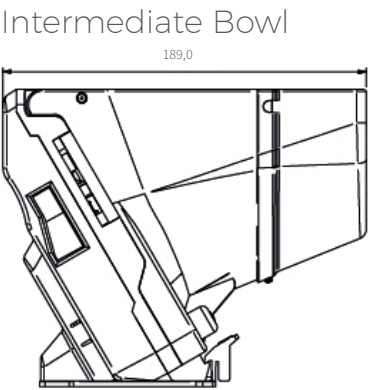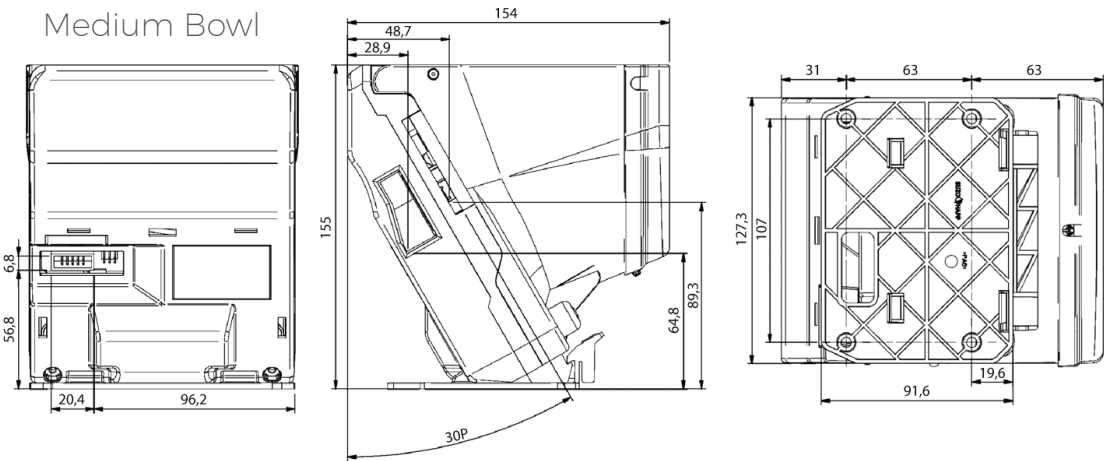

Note: Unit of measure: mm

Optional Accessories

- 8 coin payout discs for combinations from 16 to 32 mm with thickness from 1.6 to 3.2 mm

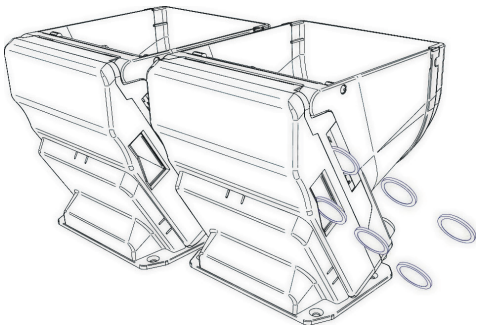

Technical Specifications

Dimensions (L x H x W)	127 x 155 x 154 mm (with medium coin bowl)	127 x 155 x 189 mm (with intermediate coin bowl)	127 x 155 x 228 mm (with large coin bowl)
Weight	757 g		
Power supply	12 ÷ 24 Vdc (min. 11 – max 26)		
Current consumption	<ul style="list-style-type: none">• 30 mA in stand by• 2.2 A (typical); 5 A (maximum) at motor start-up• 0.5 A @ 12 Volt (typical); 0.6 A @ 24 Volt (typical); 0.9 A (maximum) during dispensing		
Operating temperature	0°C ÷ 50°C - Relative humidity: 10% ÷ 75%		
Coins accepted	Ø 16 ÷ 32 mm – thickness 1.6 - 3.2 mm		
Payout speed	7 coins per second		
Connection	10 pole connector (2x5 pitch 2.5mm) such as Molex series 8624 or similar		

Coin Capacity

	1 € (with medium bowl)	1 € (with intermediate bowl)	1 € (with large bowl)
Capacity	375	546	747