

Vantage Connect

The 6-tubes coin recycler ready for IoT




Vantage Connect is a new IoT-ready device which represents the **latest innovation** in coin acceptance and recycling technology. Thanks to the **PRP (Payout Redundancy Protection)** system, six tubes and three independent motors, it delivers superior results to vending operators in terms of **high coin capacity, excellent payout reliability and maximum configuration flexibility**. Vantage Connect is equipped with **wireless capability** which allows operators to modify all the parameters, update firmware and optimize maintenance with a common smartphone or tablet, eliminating the need for proprietary handheld device. Vantage Connect takes cash management to the next level by **maximizing** operators' profits and **reducing** machine downtime.

Features


- Acceptance and payout of all circulation coins
- 6 self-filling tubes reducing refilling needs and providing optimum set-up of payout configuration and float level and easy access in case of maintenance
- Modular cassette structure for great freedom in tube configuration
- Payout combination optimization to meet each machine's planogram and site users payment behavior
- High payout speed of up to 6 coins per second and acceptance speed of up to 3 coins/second
- MFT technology providing a more secure coin validation, sensor system to measure up to 40 different parameters
- Easy and fast programming with user-friendly intuitive menu
- Simplified update through smartphone, tablet or laptop
- Easy access to validation and sorting area for maintenance



QR-Code for local wireless connection

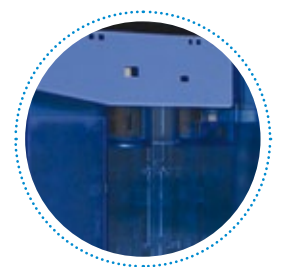

6 tubes and 3 independent motors

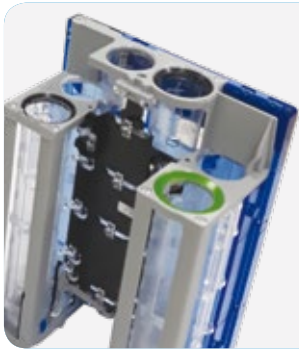

PRP System (Payout Redundancy Protection)

6 tubes cassette and 3 independent motors for high payout safety and the minimization of down time



User-friendly menu for easy programming through smartphone, tablet or laptop



Easy access to moving parts to help maintenance

Technical specifications

Dimensions (LxHxW)	137.75 x 377.10 x 80.00 mm
Protocols	MDB, VCCS
Acceptance speed	up to 3 coins per second
Payout speed	up to 6 coins per second
Accepted coins	Ø 15 ÷ 32.5 mm - max thickness 3,7 mm
Acceptance rate	95% + first insertion 98% + second insertion
Power supply	18V ÷ 43V DC
Operating temperature	-25°C ÷ +80°C 10% ÷ 75% umidity non-condensed

Tubes combinations

Diameter (mm)	TUBES					
	A	B	C	D	E	F
29.0 – 32.5	•					
26.5 – 29.0	•		•			•
24.5 – 26.5	•		•		•	•
23.0 – 24.5	•	•	•	•	•	•
21.5 – 23.5	•	•	•	•	•	•
20.0 – 21.5		•	•	•	•	•
18.5 – 20.00		•	•	•	•	
17.0 – 18.5		•		•	•	
16.0 – 17.0		•		•	•	
15.0 – 16.0		•		•		