





Rev	AMEND	DATE	CHECK	APPR.
P1	Proto	2018.02.23	H.I.Woo	H.Y.Sohn
P2	Changed LED Strip Input Voltage DC5V ---> DC12V	2018.02.27	H.I.Woo	H.Y.Sohn
P3	Changed LED Strip Type Reel Type ----> PCB Type	2018.04.13	H.I.Woo	H.Y.Sohn
P4	Changed I/O Port Name RGB Input ----> VGA Input	2019.05.28	H.I.Woo	H.Y.Sohn

## Front View

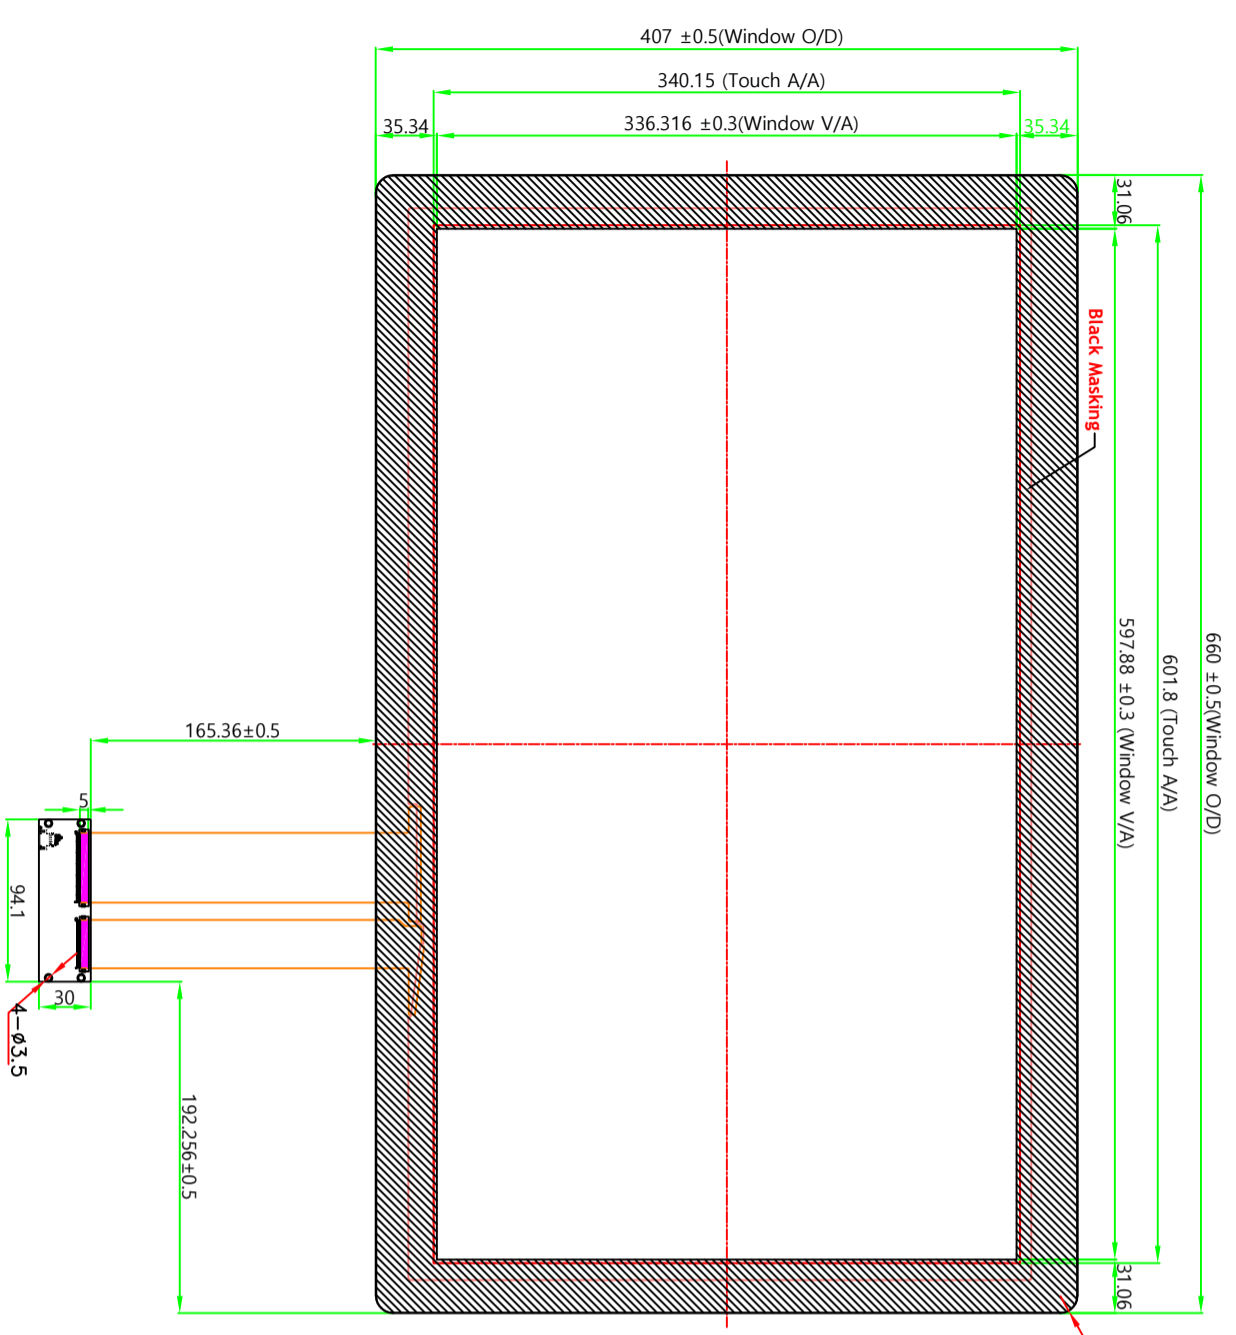

## Rear View

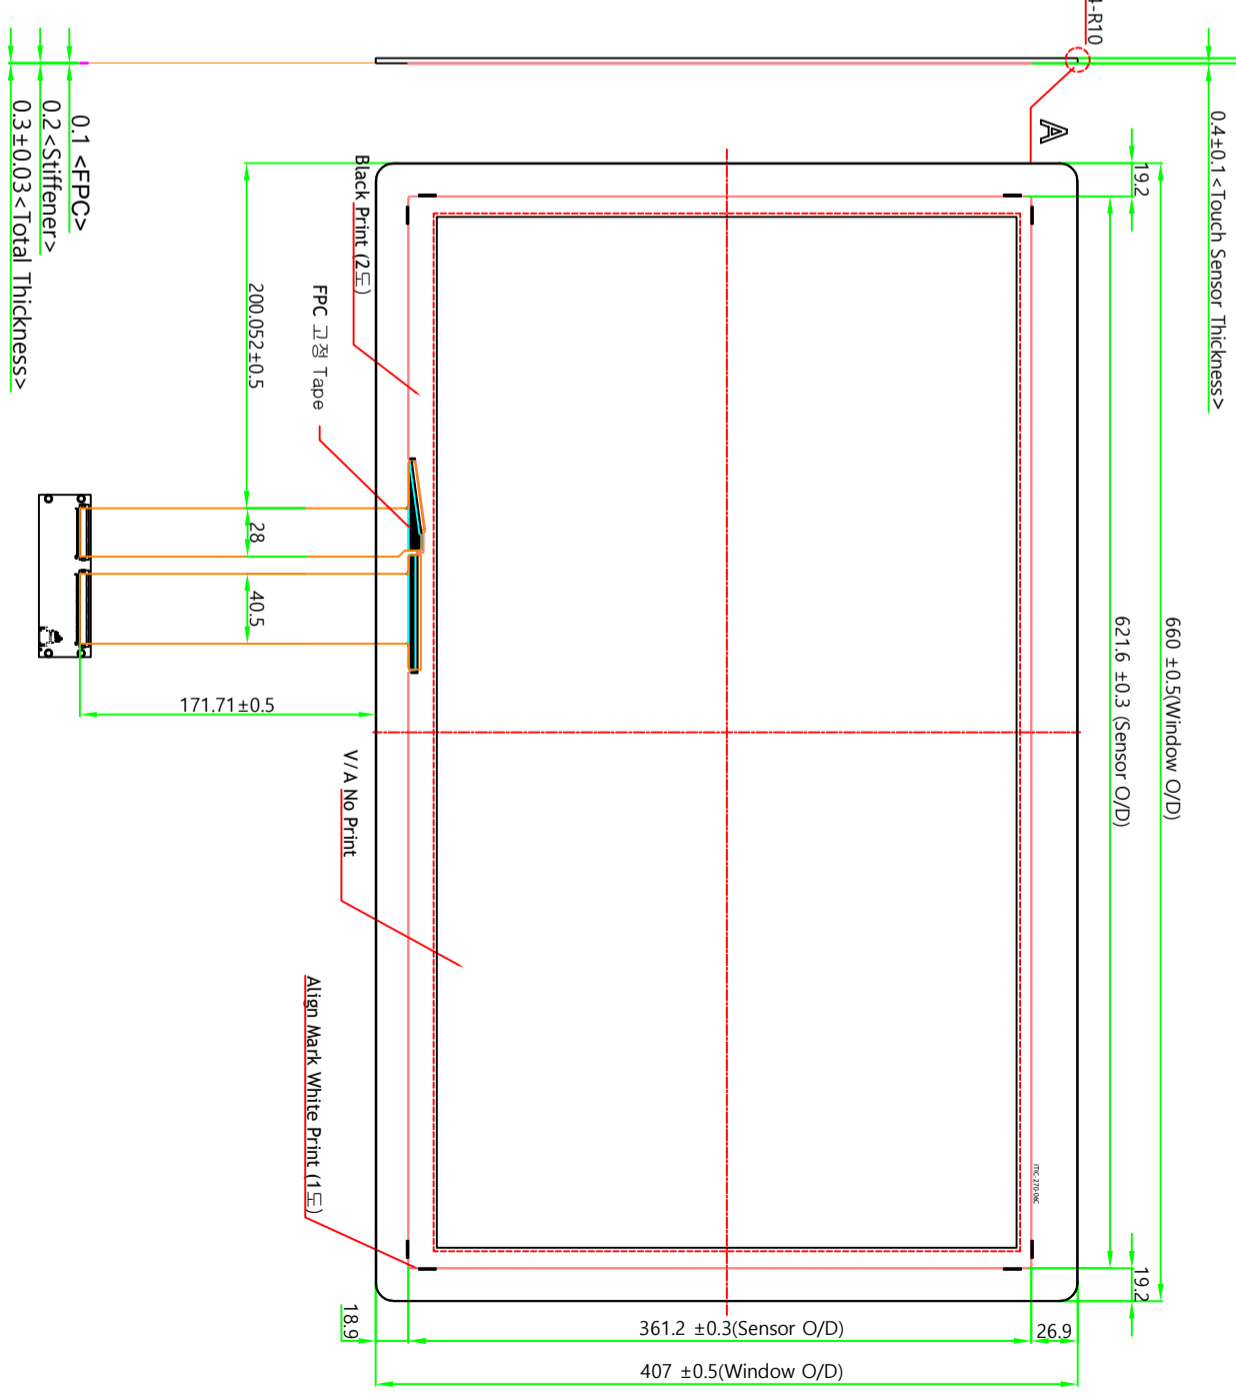

### NOTES

- Type : GFF Type Capacitive Touch Panel
- Touch Performance : 10point ,  $\phi 8$
- Interface : USB
- Window Glass : Tempered Soda Lime 3T
- Window Decoration Color : Black Color Printing  
Align Mark White color Printing
- Transmittance :  $88\% \pm 3\%$
- Surface Hardness : More than 6H
- Control Board : Silicon Works

### STACK UP & MATERIAL

Description	Material	Thickness
Cover Window	Tempered Soda Lime	3000um
Top OCA		100um
Top Film	ITO Film	100um
MID OCA		100um
Bot Film	ITO Film	100um

Total Thickness - 3400um

- Black Masking : 2 time  
- Touch Align Mark : 1 time  
**27.0" LED-Halo Lighting Model Touch Glass Drawing**

		MODEL NO	150DLP2701		VIEW :			UNIT : mm
		NAME	27.0" Closed Frame		Qty	1		REV. P4
DRAWN	CHECKED	APPROVED	DWG. NO	4M2703037-03	SCALE	1 / 1		DATE
H.I.Woo		H.Y.Sohn	MATERIAL / FINISH	EGI T=1.2				2019.05.28