

PayCheck® NextGen™


The "ONE" Printer you need

PayCheck
NextGen™

PayCheck® NextGen™ is the 'One' printer venues need to ensure reliability, functionality and connectivity. It's the fastest printer in gaming able to assure the longest print head life.

Features

- Integrated anti-jamming
- Paper low on last ticket or more (adjustable)
- PC based infrastructure
- Straightpaper path
- Easy paper path access
- Multiple USB ports, MicroSD reader, HDMI, Bluetooth
- Durable, intuitive, modular design
- Truly hot swappable
- Standard casing footprint
- Standard 400 Ticket Tray (600, 800 extensions)
- Couponing ready
- RoHS compliant

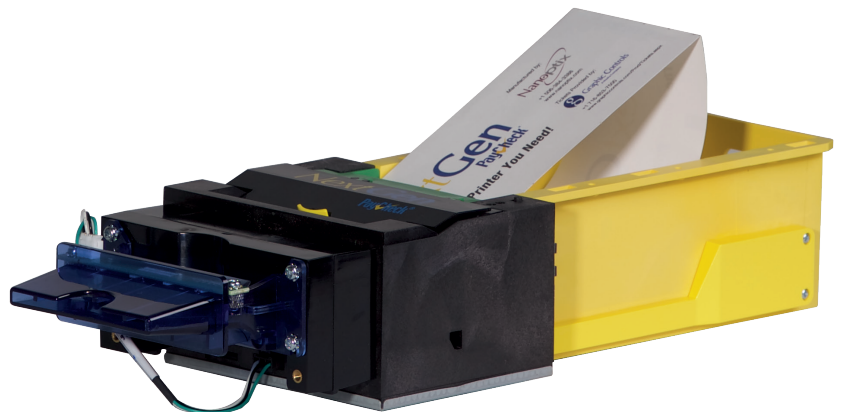

NANOPTIX

Benefits

- ✓ Better reliability and lower overall cost
- ✓ Greater customer satisfaction
- ✓ Reduces paper jams no matter the bezel used
- ✓ Save on paper cost by no longer wasting tickets
- ✓ Use any fonts, images and logos for your tickets
- ✓ No jamming within a presenter
- ✓ Fast & easy maintenance
- ✓ Easy field service and upgrades
- ✓ Easy access to all major components
- ✓ Easy replacement without powering down
- ✓ Fast plug-and-play replacement
- ✓ Reduce downtime with larger ticket capacity
- ✓ Advertise your services easily
- ✓ Usable in all jurisdictions worldwide

Integrated anti-jamming
paper path



Easy access for
simplified maintenance



Printing characteristics


- 250 (9.8") per second in text mode (monochrome)
- 125 mm (5") per second in two-color mode
- 520 dots per line
- 203 dots per inch
- 62.5 mm (2.46") print zone width (near-edge printing)
- 8 dots/mm horizontal and vertical

Communications interface options

- Bidirectional RS-232 (up to 57.6 kbps)
- 3 Dedicated USB 2.0 Communication Ports + 2 Slave USB 2.0 Communication Ports
- HDMI port, 1080p - Ethernet Port - MicroSD Card Reader - Bluetooth - Netplex protocol GDS protocol - Windows driver


Reliability

Printhead: 100 km or 100 million pulses for monochrome (approximately 640,000 TITO tickets)
50 km or 50 million pulses for 2 color

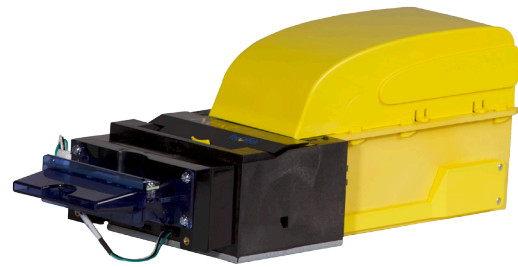

Configurable Options

Multiple bezel color options



Blue



Red



Green



400 Note



600 Note



800 Note

Ticket tray note sizes: 400 (default), 600, 800

Technical Specifications

Printer

Size (HxWxD)	67x113x286 mm
Weight	1.25 kg (2.75lbs)
Power requirements	24/12Vdc at 2.4A maximum (excluding exit lamp) Exit lamp: 24/12Vdc 20mA required by lighted bezel Bezel port can sync up to 2A
Operating temperature	0 to 70°C (32 to 158°F)
Storage & shipping temperature	-20 to 75°C (-4 to 167°F)
Operating humidity	5 to 90% RH (non-condensing)

Technical Specifications

Paper/Media

Type	Top-coated thermal sensitive (Qualified for KanzakiT0381N, Appleton Royale, Nashua Corporation NT 10149)
Ticket (W x L)	65 mm (2.56") x 156 mm (6.12")—TITO format
Ticket thickness	0.114-0.127 mm (0.0045-0.005")
Perf. Strength	1.59 +/-0.27 kg (3.5 +/-0.6 lbs)
Monochrome or three 2-color choices	red/black, blue/black, green/black